
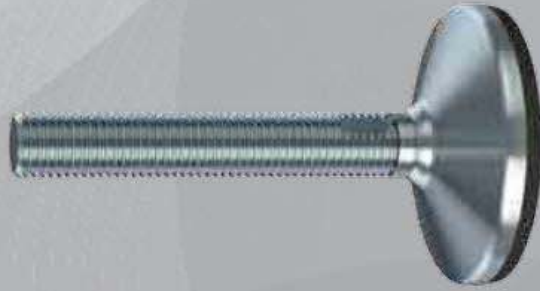
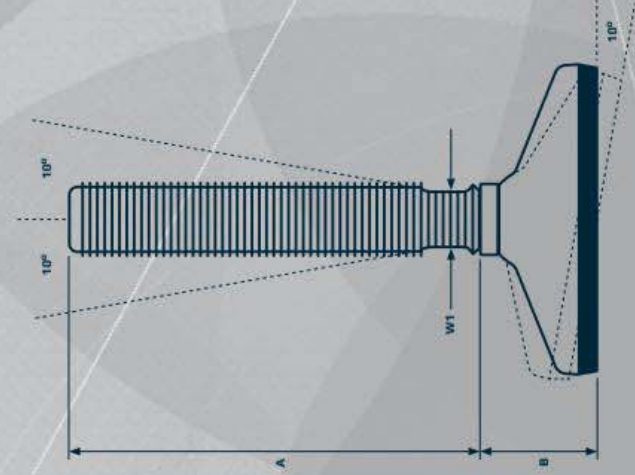


# FULLY-THREADED LEVELLING FEET HX

The design and patent protected HX fully-threaded levelling foot is the optimal choice for machinery and equipment in diverse production environments.

Minimum cleaning effort is obtained by the design of the self-draining surfaces.

Additionally, the foot is hygienically sealed to the floor by vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate.

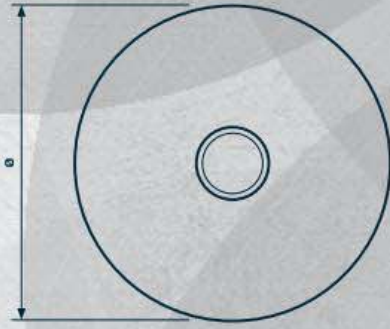

FOOT PLATE



SPINDLE



THREAD

W1  
(mm)

PRODUCT CODE  
EXAMPLE  
FOOT - THREAD - SPINDLE TYPE  
HX065 - 12 - 050

TYPE	DIAMETER Ø [mm]	HEIGHT B [mm]	NOM LOAD COMPRESSION [N]	ITEM CODE
65	65	34	9.000	HX065
80	80	39	15.000	HX080
105	105	39	22.000	HX105
125	125	40	32.000	HX125
150	150	42	65.000	HX150

TYPE	50	70	100	150	180	230	310
THREAD	M12	M16	M20	M24	M30	M36	M42
HEIGHT A [mm]	49	70	97	139	172	223	305

Total height  
Maximum nominal load  
Tolerance of height A

\* A + B  
\* Lowest value for footplate or spindle  
\* +/-1,5 mm  
\* Adjust A +6 mm and B -6 mm if footplate is combined with spindle M30, M36 or M42

