

# CERTIFIED HYGIENIC XHS

- CERTIFIED HYGIENIC
- MINIMIZED CLEANING TIME
- MINIMIZED WATER USAGE

The design and patent protected XHS levelling foot is the optimal choice for machinery and equipment that has to comply with the strictest hygienic requirements.



The thread is covered with a hygienic sleeve, which cannot be overadjusted and secures safety against exposed thread. The sleeve also functions as counter nut.

All movable parts are 100% hygienically sealed even if the load on the foot is removed. All sealings are blue and therefore detectable by scanning systems.

Minimum cleaning effort is obtained by the design of the self-draining surfaces. Additionally, the foot is hygienically sealed to the floor by vulcanized, FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate.

#### Included in every shipment

- Official 3-A, USDA and EHEDG hygienic certificates
- Installation instructions
- Cleaning & maintenance instructions

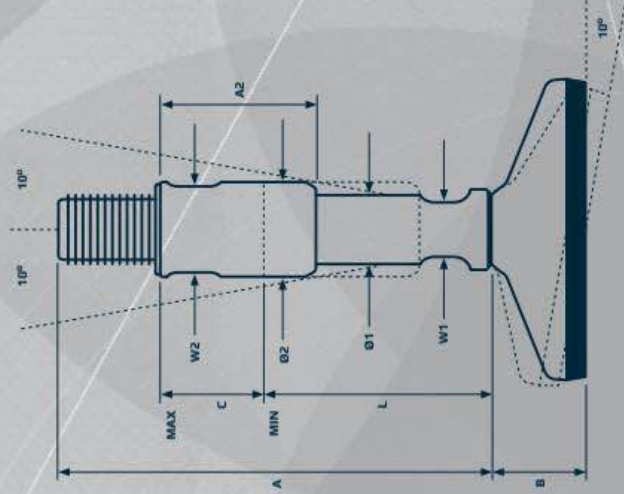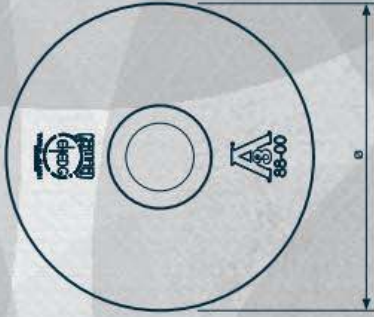

# CERTIFIED HYGIENIC LEVELLING FEET XHS



PRODUCT CODE: FOOT - SPINDLE - SLEEVE  
EXAMPLE: XHS065-XHS16150-RHDXS1655



#### FOOT PLATE




TYPE	DIAMETER Ø [mm]	HEIGHT B [mm]	NOM LOAD COMPRESSION [N]	ITEM CODE
65	65	28	9.000	XHS065
80	80	33	15.000	XHS080
105	105	33	22.000	XHS080
125	125	34	32.000	XHS125
150	150	34	65.000	XHS150

#### SPINDLE



THREAD	HEIGHT A [mm]	MIN HEIGHT L [mm]	W1 [mm]	DIAMETER Ø1 [mm]	NOM LOAD COMPRESSION [N]	ITEM CODE
M16	155	80	13	16	30.800	XHS16155
M16	215	110	13	16	24.900	XHS16215
M20	155	80	15	20	48.200	XHS20155
M20	215	110	15	20	48.200	XHS20215
M24	155	80	19	24	69.200	XHS24155
M24	215	110	19	24	69.200	XHS24215
M30	155	80	24	30	110.200	XHS30155
M30	215	110	24	30	110.200	XHS30215
M36	155	80	27	32	160.200	XHS36155
M36	215	110	27	32	160.200	XHS36215

#### SLEEVE



THREAD	W2 [mm]	DIAMETER Ø2 [mm]	HEIGHT A2 [mm]	ADJUSTMENT C [mm]	ITEM CODE
M16	22	24,8	55	36	RHDXS1655
M16	22	24,8	85	66	RHDXS1685
M20	27	29,7	55	36	RHDXS2055
M20	27	29,7	85	66	RHDXS2085
M24	30	34,5	55	36	RHDXS2455
M24	30	34,5	85	66	RHDXS2485
M30	36	39,5	55	33	RHDXS3055
M30	36	39,5	85	63	RHDXS3085
M36	46	49,5	55	33	RHDXS3655
M36	46	49,5	85	63	RHDXS3685

Total height  
Minimum usable height  
Maximum usable height  
Maximum nominal load  
Tolerance of total height

- \* A + B
- \* B + L
- \* B + L + C
- \* Lowest value for footplate or spindle
- \* +/- 1,5 mm

