

FULLY-THREADED LEVELLING FEET






The design and patent protected M fully-threaded levelling foot is the optimal choice for machinery and equipment in diverse production environments.

The wide footplate variety makes the Type M Series applicable to all sizes of machinery and equipment.

Lowered cleaning effort is obtained by the design of the self-draining surfaces.

Additionally, the foot is hygienically sealed to the floor by vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate.

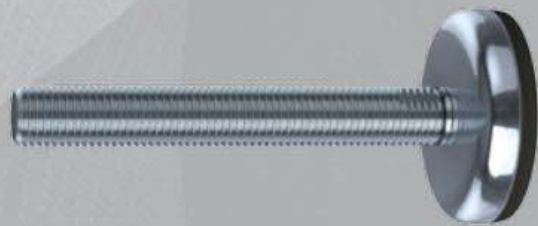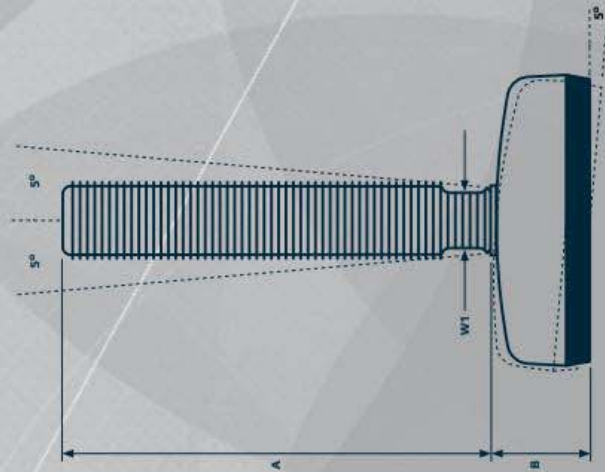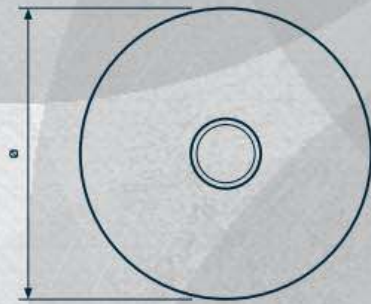

FOOT PLATE



SPINDLE

PRODUCT CODE
EXAMPLE M040-8-050

FOOT - THREAD - SPINDLE TYPE

TYPE	DIAMETER Ø [mm]	HEIGHT B [mm]	NOM LOAD COMPRESSION [N]	ITEM CODE
40	40	22	2.500	M040
50	50	23	4.000	M050
75	75	24	10.000	M075
100	100	34	22.000	M100
105	100	32	12.000	M105
125	125	39	30.000	M125
150	150	42	45.000	M150
180	180	42	50.000	M180

THREAD	TYPE	50	70	100	150	180	230	310	W1 [mm]
* M8		3.500	3.500	3.500	1.700	1.200	700	-	6
** M10		3.500	3.500	3.500	3.500	2.000	1.700	-	9
M12		17.000	17.000	17.000	8.000	5.000	3.000	-	10
M16		-	32.000	32.000	29.000	20.000	12.500	7.500	13
M20		-	49.000	49.000	49.000	48.000	30.000	15.000	17
M24		-	70.000	70.000	70.000	70.000	65.000	35.000	19
*** M30		-	112.500	112.500	112.500	112.500	112.500	95.000	24
** M36		-	162.000	162.000	162.000	162.000	162.000	162.000	30
*** M42		-	220.000	220.000	220.000	220.000	220.000	220.000	36
HEIGHT A [mm]		53	72	106	147	180	230	313	

Total height
Maximum nominal load
Tolerance of height A

- * A + B
- ** Lowest value for footplate or spindle
- ** +/- 1.5 mm



- * M8 spindle only supplied for M40 footplate
- ** M10 spindle not supplied for M100 - M180 footplates
- *** M30, M36 and M42 spindle not supplied for M40 and M50 footplates

